Additional Resources: Product Page



date 03/19/2025 page 1 of 3

MODEL: HSB41-303014P | DESCRIPTION: HEAT SINK

FEATURES

- BGA design
- push pins
- aluminum alloy
- black anodized finish



MODEL	thermal resistance ¹				
	@ 75°C ∆T, nat conv (°C/W)	@ 1 W, nat conv (°C/W)	@ 1 W, 200 LFM (°C/W)	@ 1 W, 400 LFM [°C/W]	dissipation ¹ @ 75°C \T , nat conv (W)
HSB40-252510P	12.63	15.1	4.3	2.9	5.94

Note: 1. See performance curves for full thermal resistance details.

PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient (ΔT = Ths - Ta) (°C)			
Power (W)	Natural Conv.	200 LFM	400 LFM	
0	0	0	O	
1	15.1	4.3	2.9	
2	29.0	8.9	5.9	
3	41.9	12.8	8.6	
4	54.0	17.1	11.6	
5	65.3	21.3	14.4	
6	75.9	25.7	17.3	
7	86.2	30.2	20.2	
8	96.2	34.2	23.0	
9	105.4	38.7 25.9		
10	115.0	42.9	28.9	

Mounting Surface Temperature Rise Above Ambient (°C) 140 Without Airflow 120 200 LFM 100 400 LFM 80 60 40 20 Ο 0 2 4 6 8 10 12 Heat Dissipated (W)

.....

Ths: "hot spot" temperature measured on the heatsink Ta: ambient temperature

.....


MECHANICAL DRAWING

units: mm tolerance: ±0.50 mm

.....

MATERIAL	AL 6063-T5
FINISH	black anodized
PUSH PIN	nylon 66
SPRING	spring steel, zinc plated
WEIGHT	15 g

.....

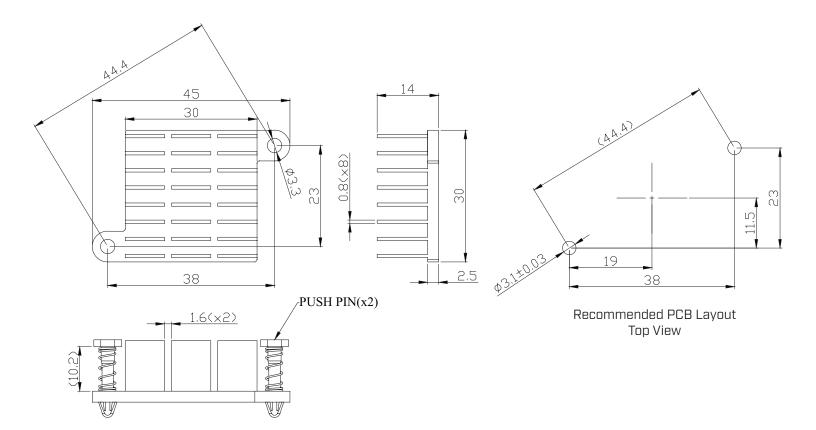

REVISION HISTORY

rev.	description	date
1.0	initial release	03/01/2024
1.01	CUI Devices rebranded to Same Sky	09/12/2024
1.02	added recommended PCB layout	03/19/2025

The revision history provided is for informational purposes only and is believed to be accurate.

Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

same sky

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.