




SERIES: CP45H

|

DESCRIPTION: PELTIER MODULE

FEATURES

- arcTEC™ structure
- solid state device
- precise temperature control
- silent operation

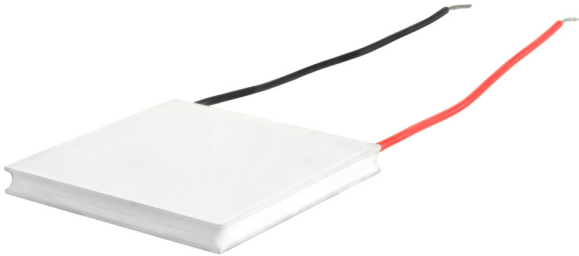

MODEL

	input voltage ¹ max [Vdc]	input current ² max [A]	internal resistance ³ typ [Ω±10%]	output Qmax ⁴		output ΔTmax ⁵	
				T _h =27°C [W]	T _h =50°C [W]	T _h =27°C [°C]	T _h =50°C [°C]
CP454375	19.5	4.5	3.54	50.7	55.7	70	77
CP455535H	15.7	4.5	2.5	41	45	70	77

Notes:

1. Maximum voltage at ΔT max and T_h=27°C

2. Maximum current to achieve ΔT max

3. Measured by AC 4-terminal method at 25°C

4. Maximum heat absorbed at cold side occurs at I_{max}, V_{max}, and ΔT=0°C

5. Maximum temperature difference occurs at I_{max}, V_{max}, and Q=0W (ΔT max measured in a vacuum at 1.3 Pa)

SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
solder melting temperature	connection between thermoelectric pairs	235			°C
assembly compression				1	MPa
RoHS	yes				

MECHANICAL DRAWING

units: mm


The drawing includes a top view showing a rectangular module with a thickness of 5.35 ± 0.1 mm. The top surface is labeled 'COLD SIDE' and the bottom surface is labeled 'HOT SIDE'. Both surfaces have a surface finish of 0.05. A side view shows the module with two wire leads extending from one end. The length of the module is 50 ± 0.3 mm, and the length of the wire leads is 100.0 ± 5.0 mm. The wire leads are labeled 'Red (+)' and 'Black (-)'.

	MATERIAL	PLATING
ceramic plate	96% AL ₂ O ₃	
wire leads	20 AWG	tin
sealer	silicon rubber 703 RTV (between cold and hot side plates)	
joint cover	silicon rubber 703 RTV	
marking	P/N & S/N printed on cold side surface	


The drawing includes a front view showing a rectangular module with a width of 50 ± 0.3 mm and a height of 50 ± 0.3 mm. The front surface is labeled 'COLD SIDE'. A side view shows the module with two wire leads extending from one end. The length of the module is 50 ± 0.3 mm, and the length of the wire leads is 100.0 ± 5.0 mm. The wire leads are labeled 'Red (+)' and 'Black (-)'.

MODEL NO.	LENGTH [mm]	WIDTH [mm]	THICKNESS [mm]
CP454375	40 ± 0.3	40 ± 0.3	3.75 ± 0.1
CP455535H	50 ± 0.3	50 ± 0.3	5.35 ± 0.1


CP454375 PERFORMANCE (Th=27°C)

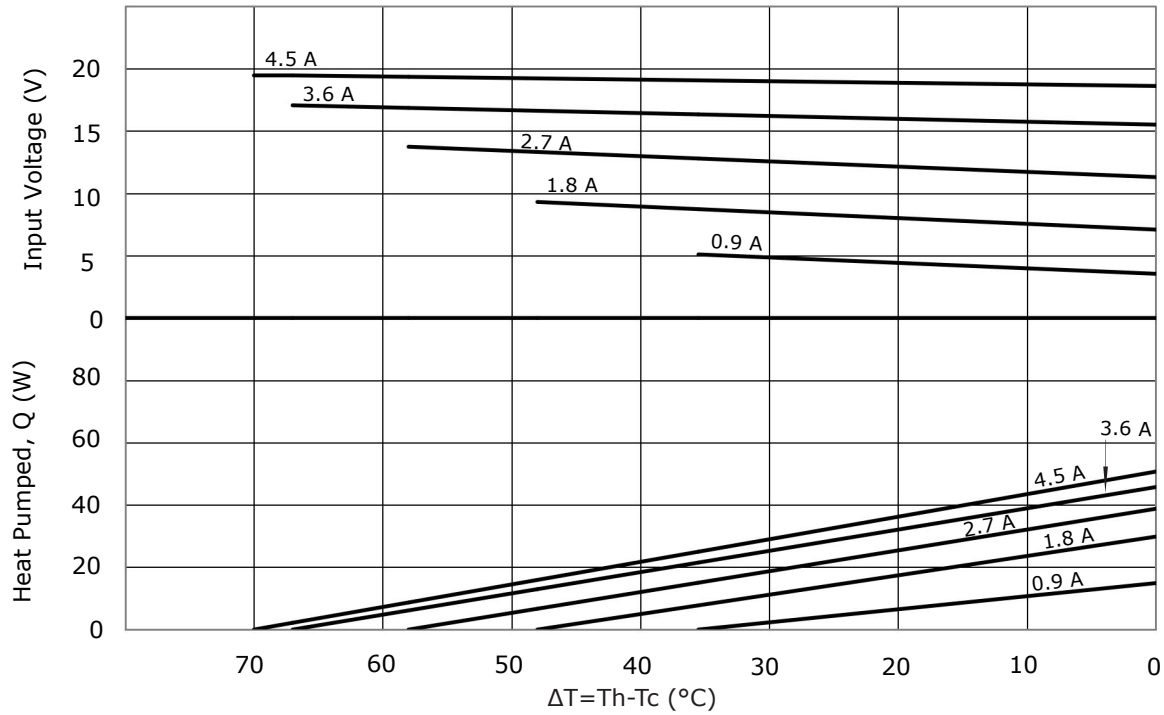


CP454375 PERFORMANCE (Th=50°C)

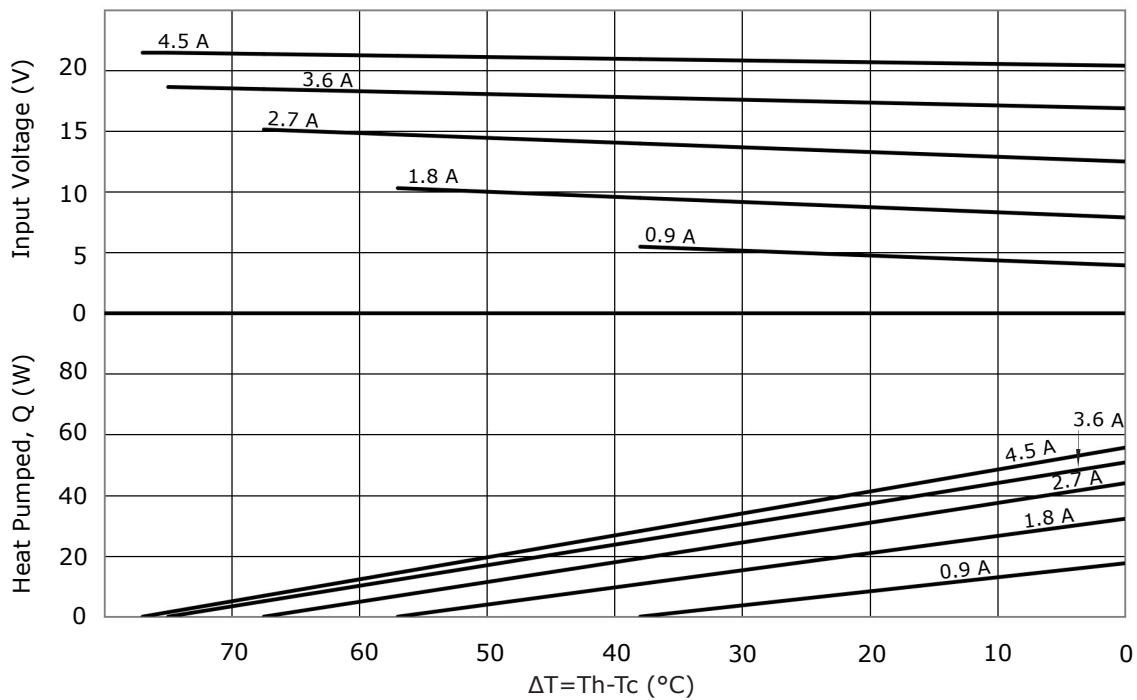

CP45535H PERFORMANCE (Th=27°C)

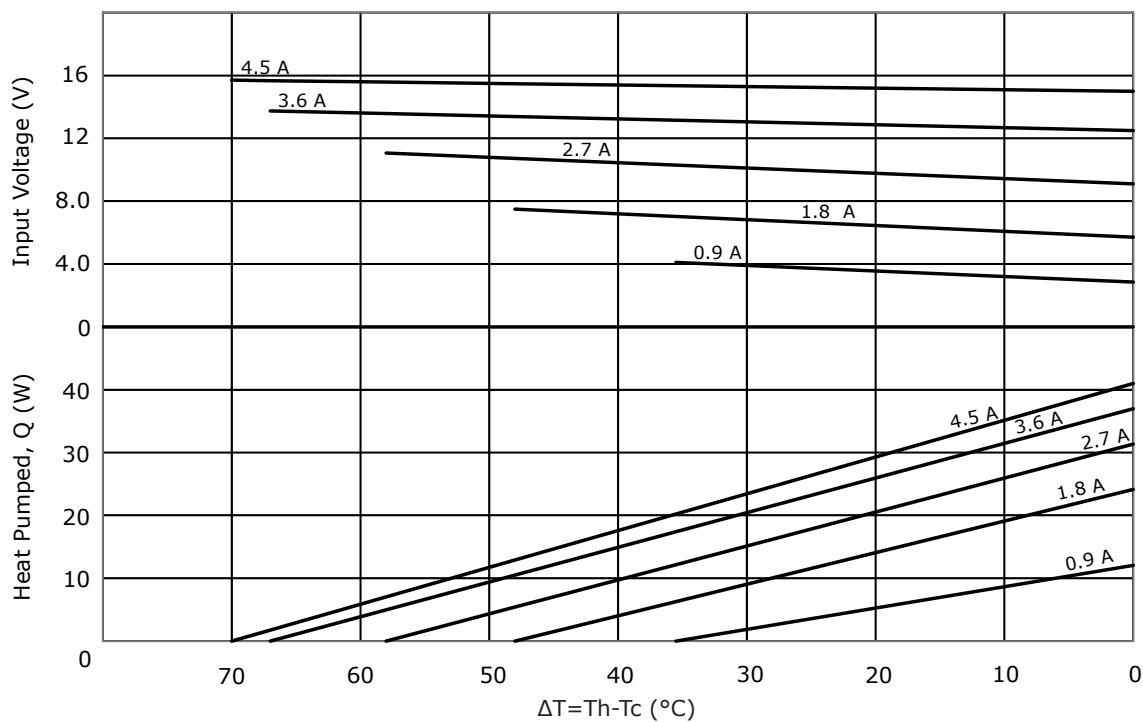

CP45535H PERFORMANCE (Th=50°C)

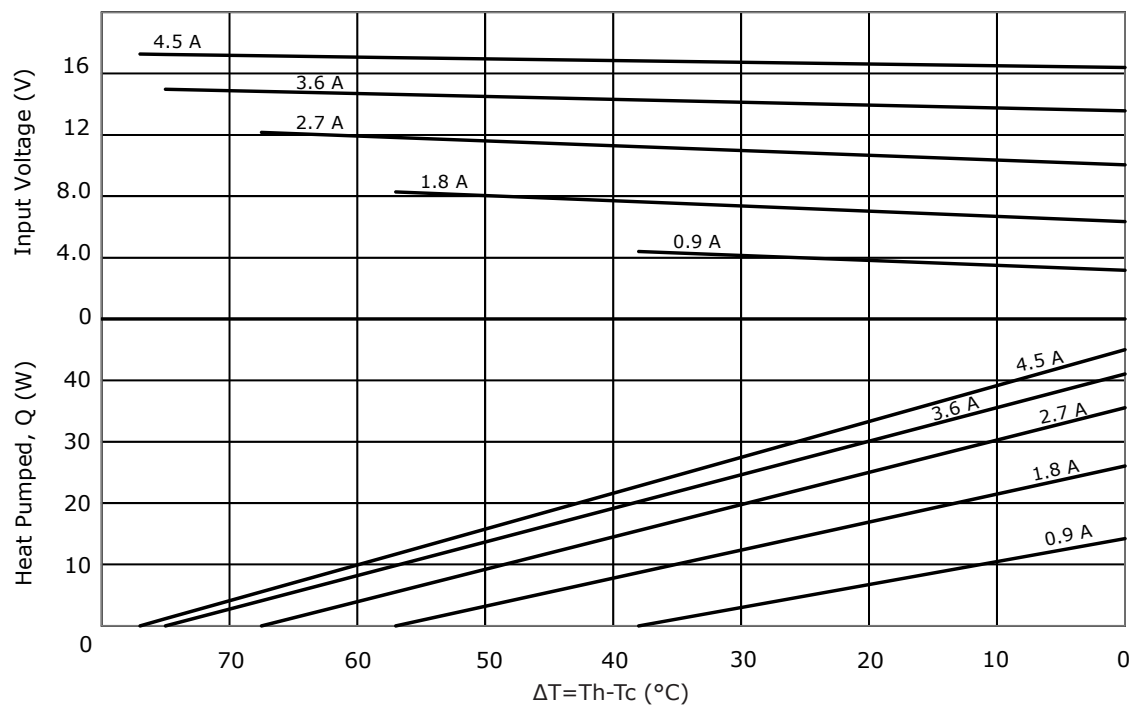

REVISION HISTORY

rev.	description	date
1.0	initial release	05/21/2018
1.01	added model CP454375, brand update	10/16/2019
1.02	logo, datasheet style update	08/05/2022
1.03	CUI Devices rebranded to Same Sky	09/12/2024

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

sameskydevices.com