



SERIES: PRY5 | **DESCRIPTION:** POWER RELAY

FEATURES

- 30 & 40 A
- epoxy sealed
- class F




MODEL

	coil voltage	coil resistance	operating voltage	release voltage	coil power
	typ (Vdc)	($\Omega \pm 10\%$)	min (Vdc)	max (Vdc)	typ (W)
PRY5-5V-900	5	28	3.75	0.25	0.90
PRY5-9V-900	9	90	6.75	0.45	0.90
PRY5-12V-900	12	160	9.00	0.60	0.90
PRY5-18V-900	18	360	13.50	0.90	0.90
PRY5-24V-900	24	640	18.00	1.20	0.90

Notes: 1. Maximum voltage is 130% of nominal voltage.
 2. Coil temperature rise 70 K max.
 3. All specifications are measured at 23±5°C, RH 25-75% unless otherwise specified.

PART NUMBER KEY

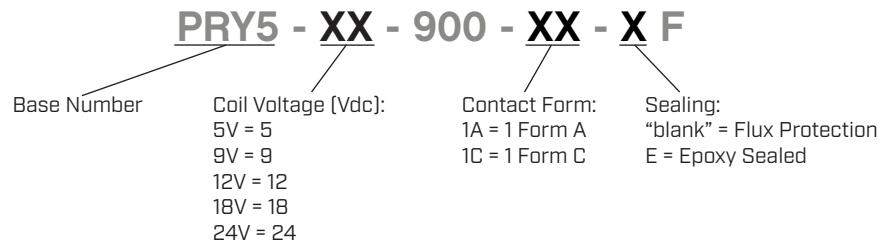

CONTACT SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
contact form	1 Form A, 1 Form C				
contact material	Ag alloy				
contact rating	1 Form A 40 A @ 250 Vac NO				
	1 Form C 30/20 A @ 250 Vac NO/NC 30/10 A @ 28 Vdc NO/NC				
contact temperature rise	at contact max rating			50	K
max switching voltage				277	Vac
max switching current	1 Form A			40	A
	1 Form C			30	A
max switching power	1 Form A			11,080	VA
	1 Form C			8,310	VA
life	1 Form A electrical: at 250 Vac/40 A, 1 second on, 9 seconds off mechanical: 0.1 seconds on, 0.1 seconds off	50,000 1,000,000			operations operations
	1 Form C electrical: at 250 Vac/30/20 A NO/NC, 1 second on, 9 seconds off mechanical: 0.1 seconds on, 0.1 seconds off	100,000 1,000,000			operations operations

GENERAL SPECIFICATIONS

parameter	conditions/description	min	typ	max	units
insulation resistance	at 500 Vdc	100			MΩ
dielectric strength	between open contacts for 1 minute		1,500		Vac
	between coil and contacts for 1 minute		2,500		Vac
coil insulation system	Class F				
operate time				15	ms
release time				10	ms
shock resistance	endurance: 3 shocks in each XYZ direction		1,000		m/s ²
	misoperation: 3 shocks in each XYZ direction		100		m/s ²
vibration resistance	endurance: 10~55 Hz, 1.5 mm double amplitude for 2 hours				
	misoperation: 10~55 Hz, 1.5 mm double amplitude for 5 minutes				
operating temperature		-40		105	°C
humidity		45		85	%RH
weight			27		g
safety approvals	UL/cUL 508				
flammability rating	UL94V-0				
RoHS	yes				
packaging	carton size: 373 x 256 x 235 mm carton QTY: 400 pcs per carton				




SOLDERABILITY

parameter	conditions/description	min	typ	max	units
wave soldering	for max 5 seconds	255	260	265	°C


MECHANICAL DRAWING (1 FORM A)

units: mm
 tolerance:
 $X \leq 1$: ± 0.20 mm
 $1 < X \leq 5$: ± 0.3 mm
 $X > 5$ mm: ± 0.4 mm
 PCB: ± 0.10 mm
 unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PBT [UL94V-0]	black
terminals	copper alloy	tin
coil terminals	enameled wire	

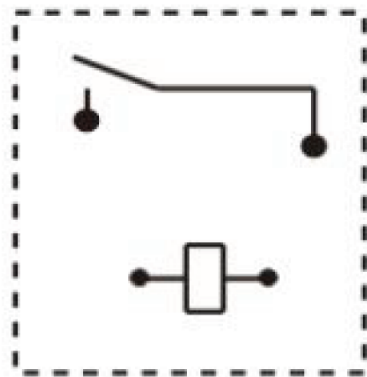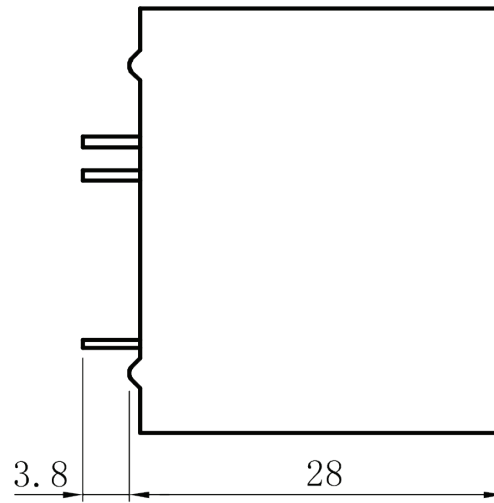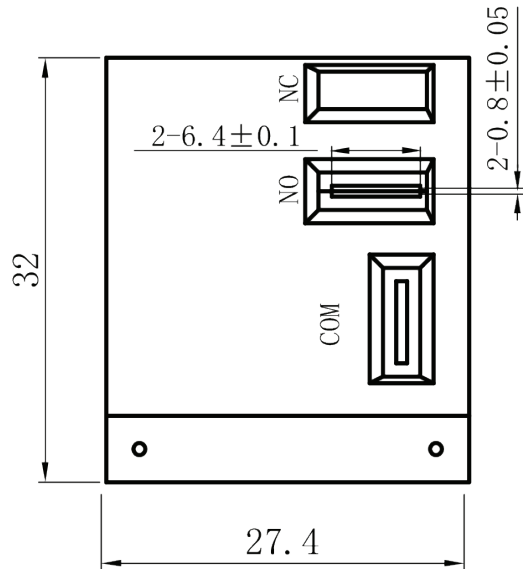

Wiring Diagram
Bottom View

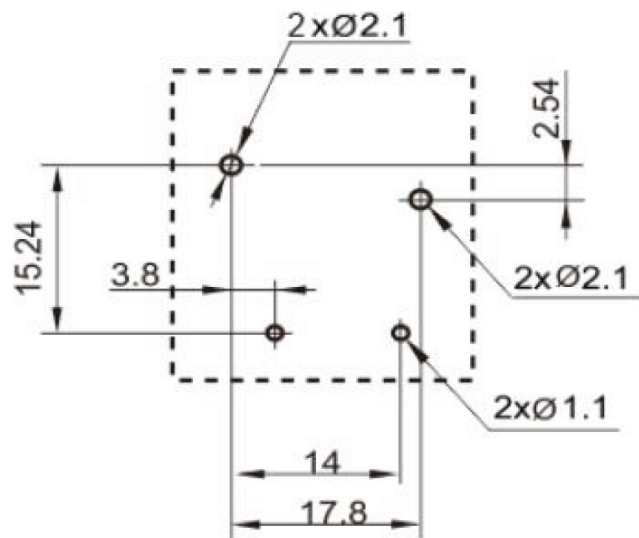


Recommended PCB Layout
Bottom View

MECHANICAL DRAWING (1 FORM C)

units: mm
 tolerance:
 $X \leq 1$: ± 0.20 mm
 $1 < X \leq 5$: ± 0.3 mm
 $X > 5$ mm: ± 0.4 mm
 PCB: ± 0.10 mm
 unless otherwise noted

DESCRIPTION	MATERIAL	PLATING/COLOR
housing	PBT [UL94V-0]	black
terminals	copper alloy	tin
coil terminals	enameled wire	

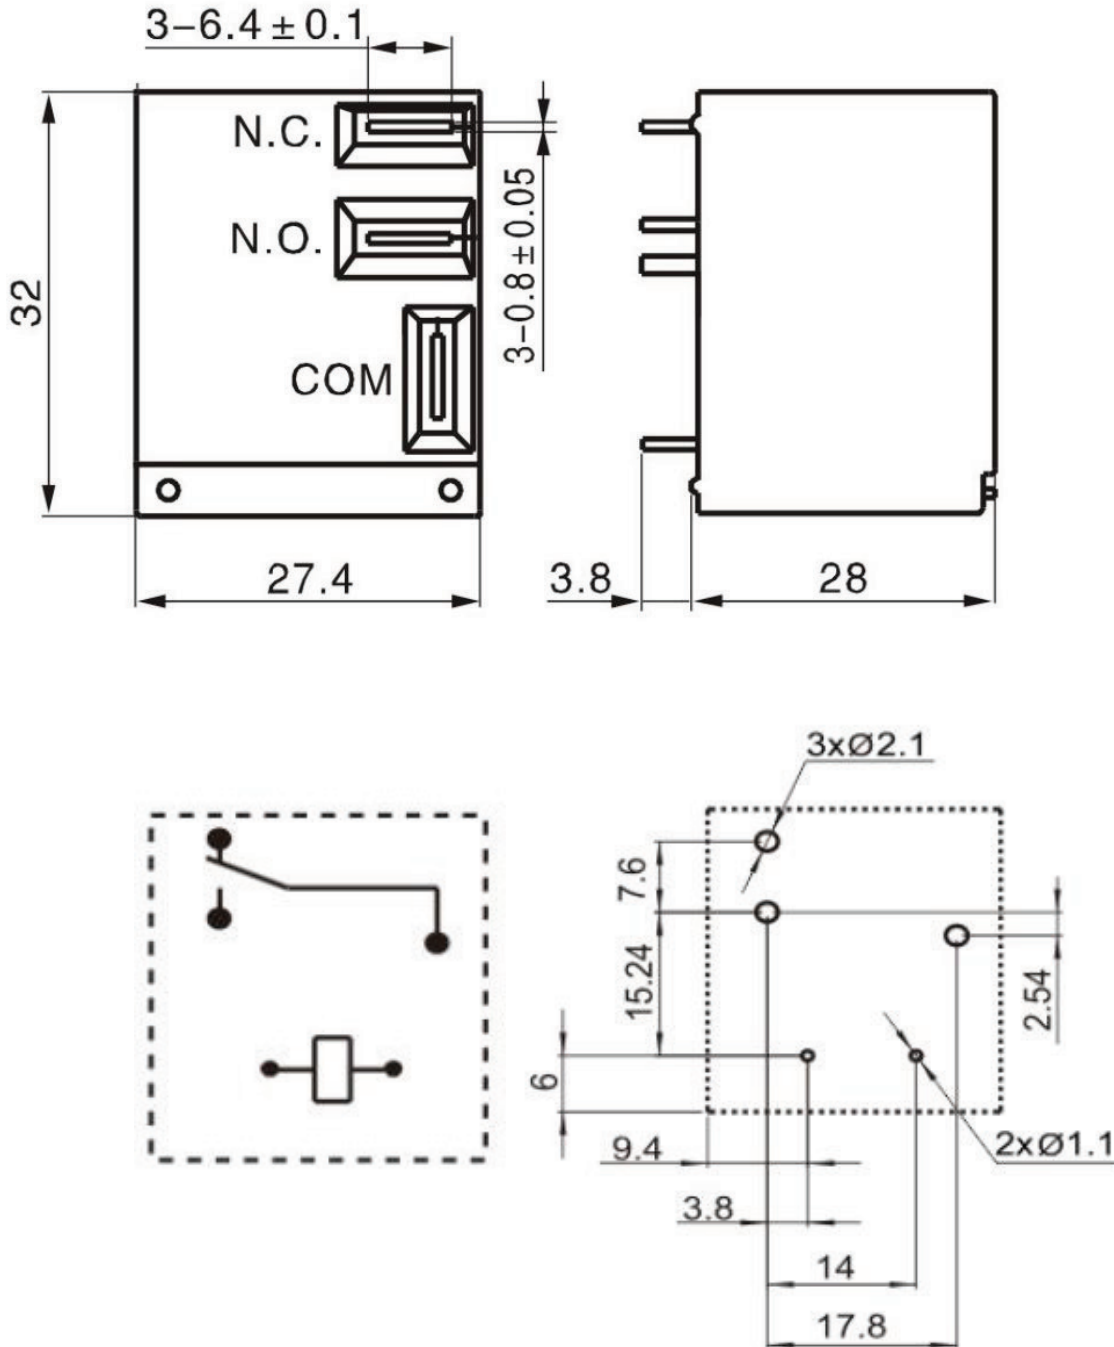

Wiring Diagram
Bottom View

Recommended PCB Layout
Bottom View

REVISION HISTORY

rev.	description	date
1.0	initial release	10/06/2025
1.01	updated datasheet	03/06/2026

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[sameskydevices.com](https://www.sameskydevices.com)