


MODEL: RF-SMA-CC-RA-F-6-020-67 | **DESCRIPTION:** RF SMA CONNECTOR

FEATURES

- frequency range 0-6 GHz
- character impedance 50 Ω
- SMA connector type
- cable crimp
- IP67


SPECIFICATIONS




parameter	conditions/description	min	typ	max	units
impedance			50		Ω
frequency range		0		6	GHz
VSWR				1.5	
working voltage	at sea level		335		Vrms
insulation resistance		5,000			M Ω
contact resistance	center contact outer contact			3 2	m Ω m Ω
dielectric withstand voltage			1,000		V
mating torque		0.3		0.6	N*m
life		500			cycles
operating temperature		-55		165	$^{\circ}$ C
standards	compliant with MIL-C-39012, CECC 22110/111				
interface	MIL-STD-348				
RoHS	yes				
IP level	IP67 [in mated condition]				

MECHANICAL DRAWING

units: mm
 tolerance:
 0.5 ≤ X ≤ 8.0: ±0.10 mm
 8.0 < X < 30.0: ±0.15 mm
 X ≥ 30.0: ±0.20 mm
 unless otherwise specified
 panel thickness: 1.2-3.0 mm

cable type recommendation: RG316

DESCRIPTION	MATERIAL	PLATING/COLOR
body	brass	gold
insulator	PTFE (UL94V-0)	white
center contact	brass	gold
o-ring	EPDM	red
gasket	brass	gold
nut	brass	gold
sleeve	brass	gold
gland	brass	gold
heat shrink tube	plastic	black

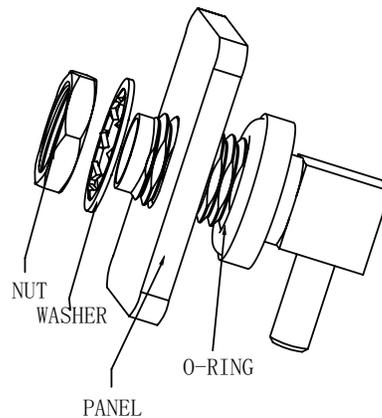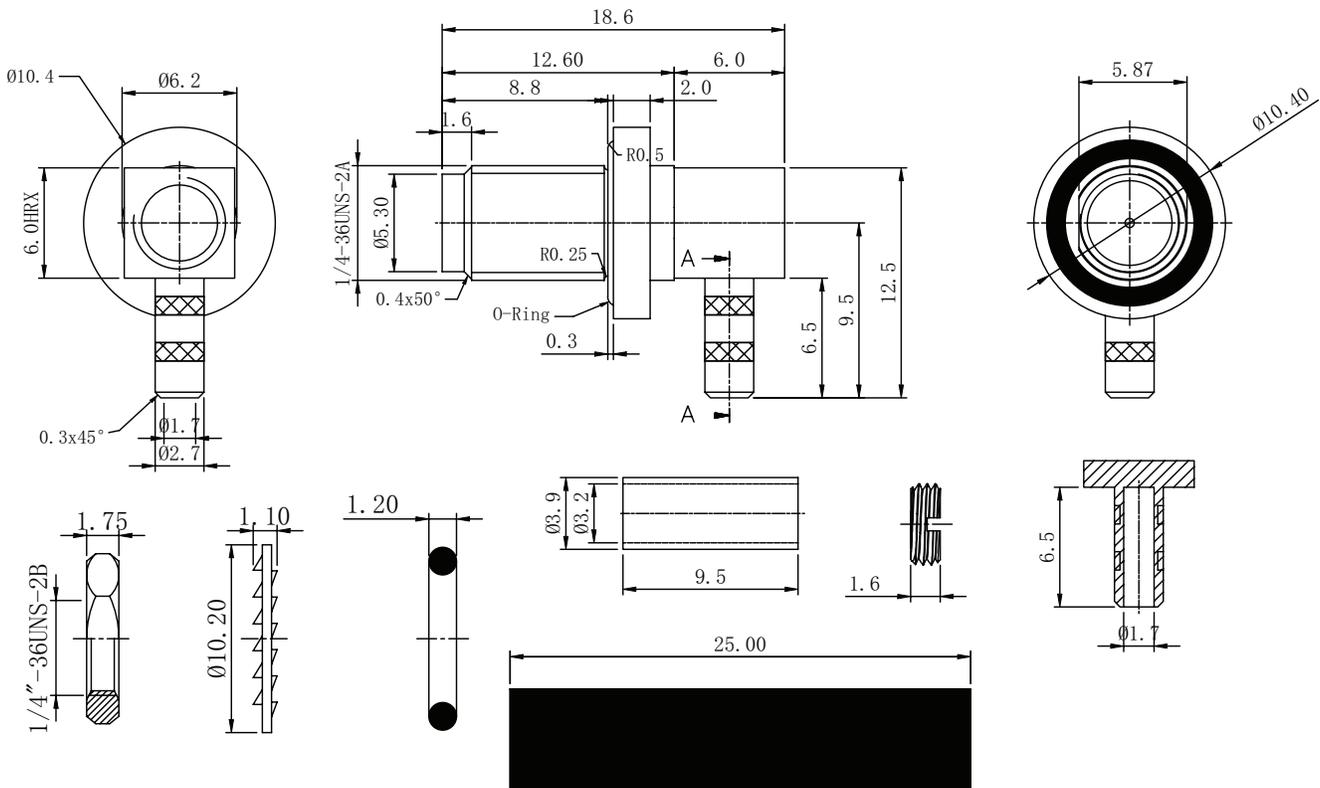

REVISION HISTORY

rev.	description	date
1.0	initial release	02/17/2026

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[sameskydevices.com](https://www.sameskydevices.com)