



MODEL: RF-SMA-RP-CC-ST-M-6-029 | **DESCRIPTION:** RF SMA CONNECTOR

FEATURES

- frequency range 0-6 GHz
- character impedance 50 Ω
- SMA connector type
- cable crimp



SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
impedance			50		Ω
frequency range		0		6	GHz
VSWR				1.5	
working voltage	at sea level		335		Vrms
insulation resistance		5,000			M Ω
contact resistance	center contact outer contact			3 2	m Ω m Ω
dielectric withstand voltage			1,000		V
mating torque		0.3		0.6	N*m
life		500			cycles
operating temperature		-55		165	$^{\circ}$ C
standards	compliant with MIL-C-39012, CECC 22110/111				
interface	MIL-STD-348				
RoHS	yes				

MECHANICAL DRAWING

units: mm
 tolerance:
 0.5 ≤ X ≤ 8.0: ±0.20 mm
 8.0 < X < 30.0: ±0.25 mm
 X ≥ 30.0: ±0.30 mm
 unless otherwise specified

cable type recommendation: LMR400

DESCRIPTION	MATERIAL	PLATING/COLOR
body	brass	nickel
insulator	PTFE (UL94V-0)	white
center contact	brass	gold
tube	brass	nickel

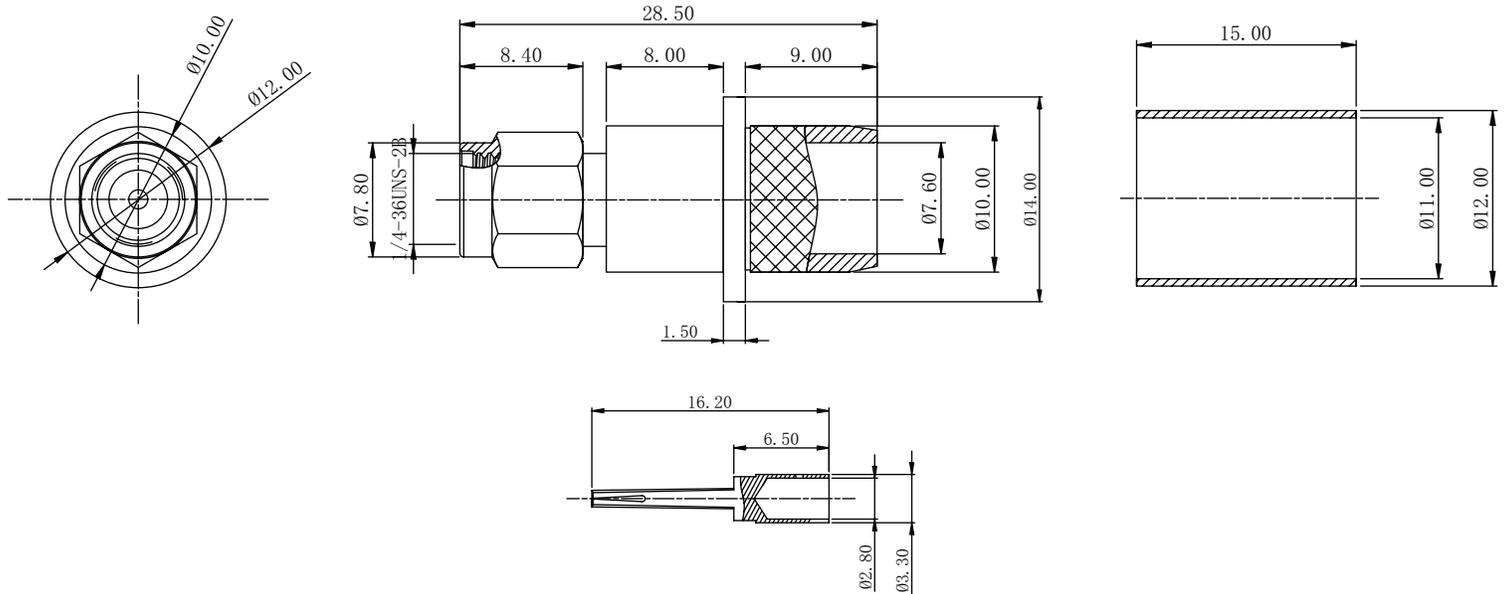

REVISION HISTORY

rev.	description	date
1.0	initial release	02/18/2026

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[sameskydevices.com](https://www.sameskydevices.com)